

SQUARE D COMPANY

CLASS 850I TYPE LS

CURRENT RATING

Contact Data


Voltage Range: 102 volts to 132 volts 50/60 Hz.

Maximum Current: Continuous: 2.5 amps RMS at 20°C (68°F). See derating curves for higher temperatures. Allowable inrush 15 amps RMS for 30 msec.

Minimum Current: 35 milliamps

WARNING

The solid state contact may not switch OFF if operated outside the indicated safe operating region.

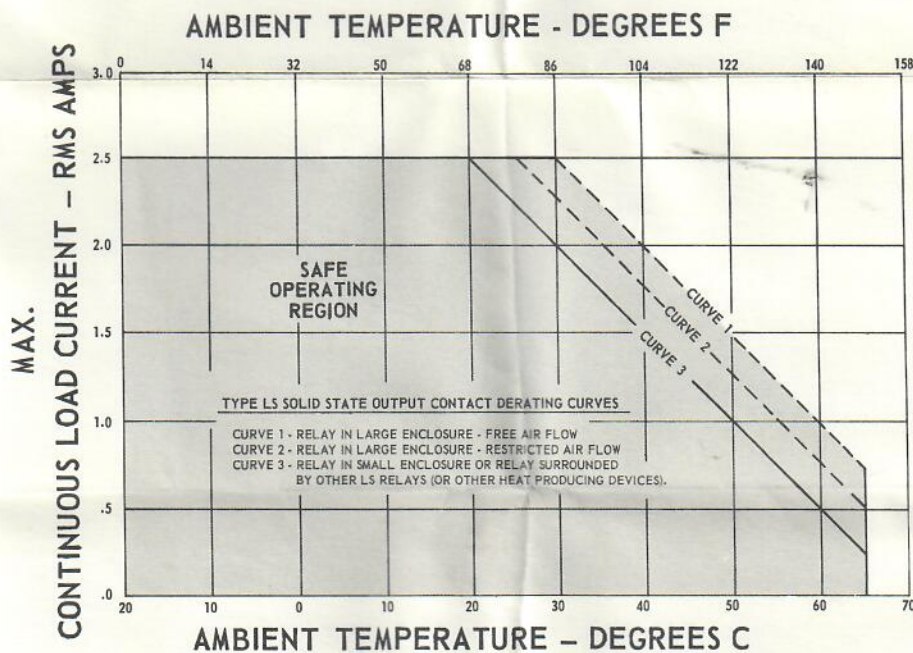

SQUARE D COMPANY
MILWAUKEE, WISCONSIN